





Thule Rapid System Kit 1426

> Instructions

LEXUS IS (MK II), 4-dr Sedan, 05-

LEXUS IS, 4-dr Sedan, *06-

*North America

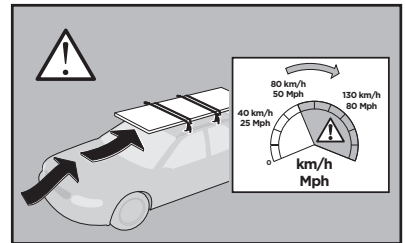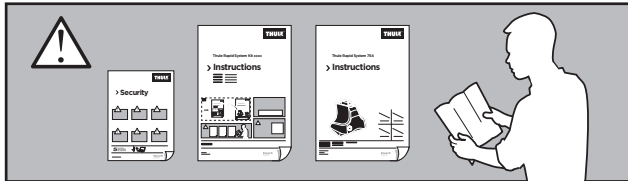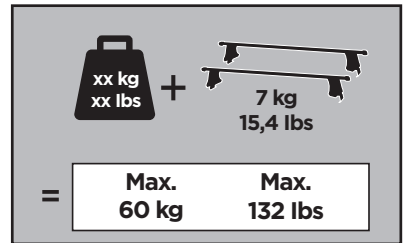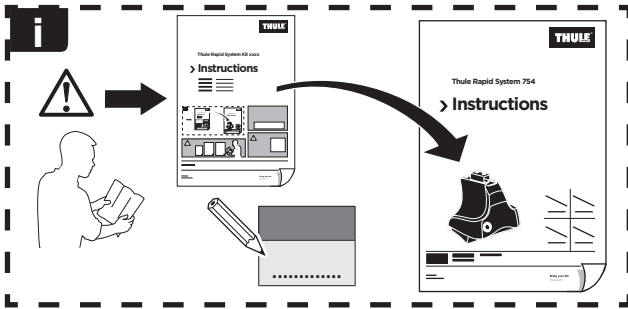

ISO 11154-E



204 x2




210 x2




x1

206 x2





853 x2



x1

1

	X (scale)	X (mm)	X (inch)
LEXUS IS (MK II), 4-dr Sedan, 05-	31	961	37 ⁷ / ₈
LEXUS IS, 4-dr Sedan, *06-	31	961	37 ⁷ / ₈


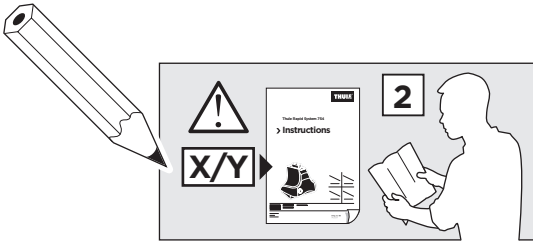


	Y (scale)	Y (mm)	Y (inch)
LEXUS IS (MK II), 4-dr Sedan, 05-	28,5	936	36 ⁷ / ₈
LEXUS IS, 4-dr Sedan, *06-	28,5	936	36 ⁷ / ₈


2

LEXUS IS (MK II), 4-dr Sedan, 05-

LEXUS IS, 4-dr Sedan, *06-

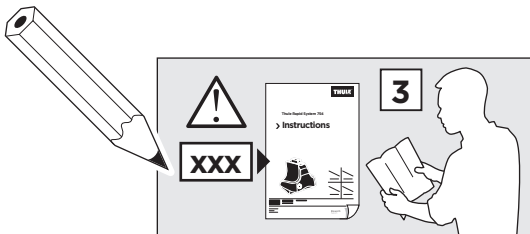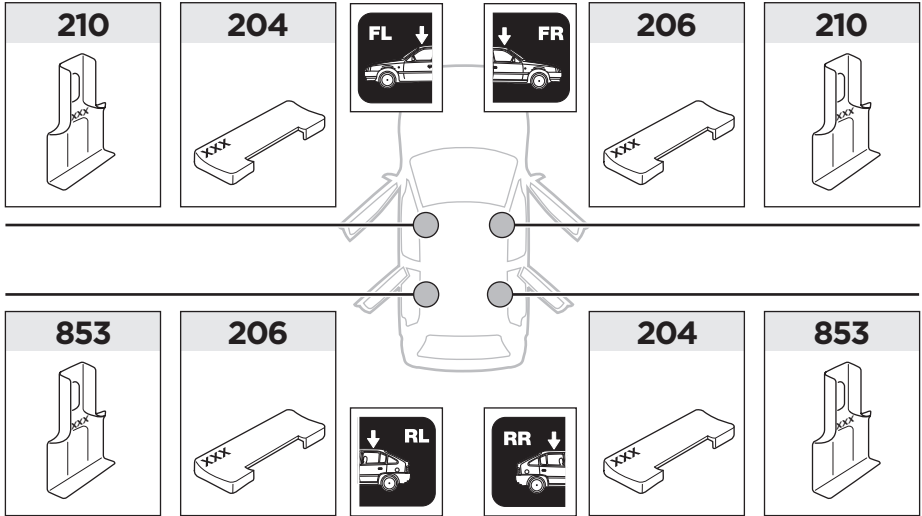

3

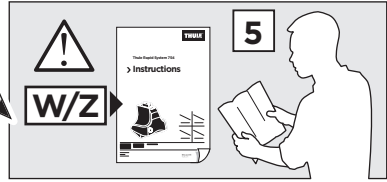

	W (mm)	Z (mm)	W (inch)	Z (inch)
LEXUS IS (MK II), 4-dr Sedan, 05-	270	620	10 ⁵/₈	24 ³/₈
LEXUS IS, 4-dr Sedan, *06-	270	620	10 ⁵/₈	24 ³/₈

