



# Seat Leon modello 2005

**MOCSKT 043**


**MOCSRROAC010 cm 110**  
**MOCSRROAL006 cm 110**





- 1 - L1115/1
- 1 - L1115/2
- 1 - L1115/3
- 1 - L1115/4
- 4 - RC1500/60
- 8 - RCVM6X9Q
- 4 - RC20200026
- 1 - RCBR5

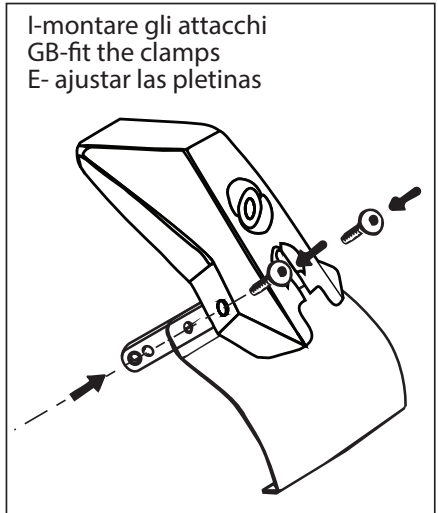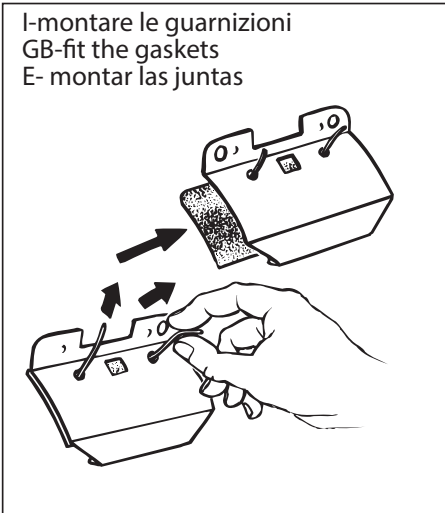

**MOCSRROAC010 cm 110**  
**MOCSRROAL006 cm 110**

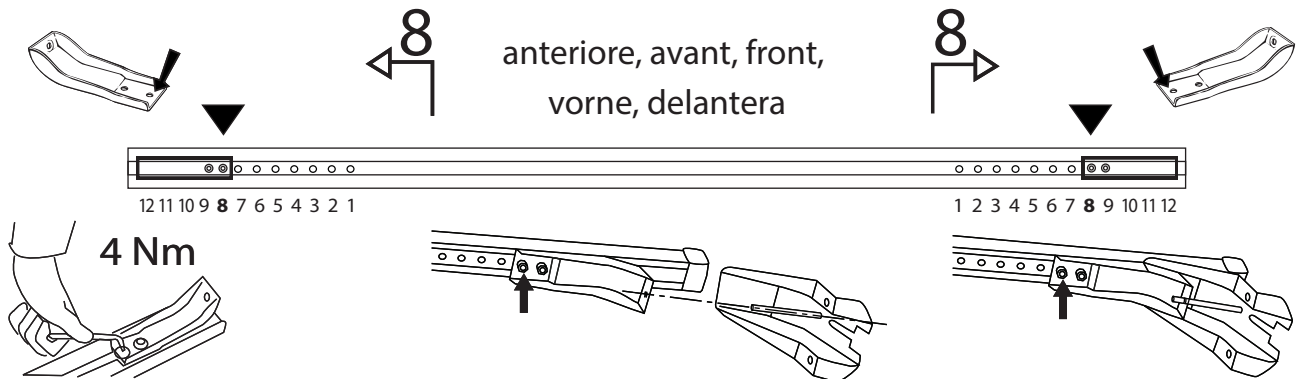


I-montare la barra anteriore  
 GB- fit the front bar  
 E- ajustar la barra frontal

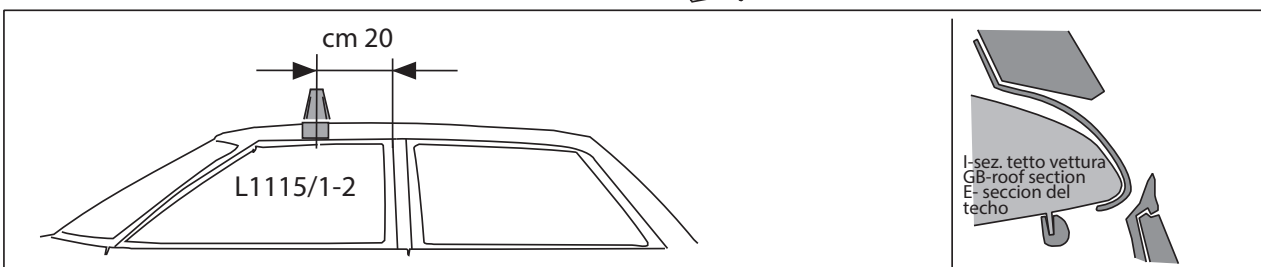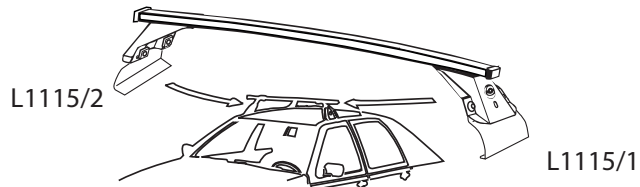






**MOCSRROAC010 cm 110**  
**MOCSRROAL006 cm 110**



**MOSCKT 043**





posteriore, arriere,  
rear, hinten, trasera



**4 Nm**

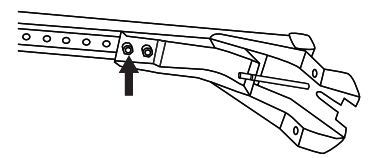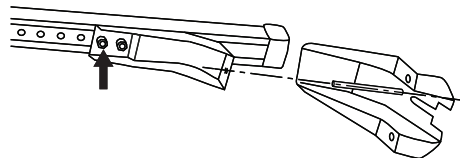

I- montare la barra posteriore  
 GB-fit the rear bar  
 E- ajustar la barra trasera

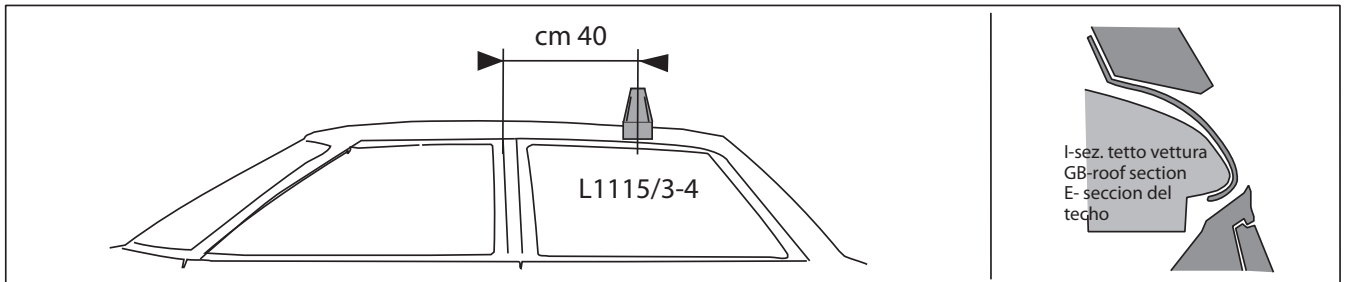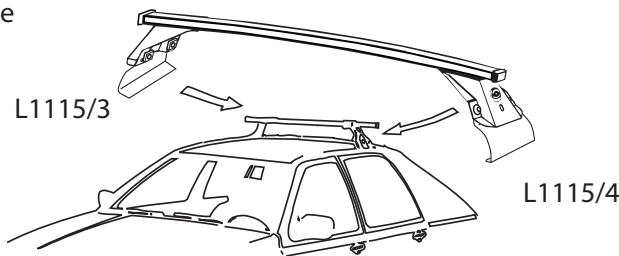

I- Per stringere, usare la chiave come indicato nel disegno. (Non si assumono responsabilità per danni causati dall' impiego di chiavi diverse da quella in dotazione al prodotto).

F- Pour serrer, utiliser la cle comme indique ci dessous.

GB-For tightening, please use the wrench as per the drawing.

D- Zum Anziehen benutzen Sie bitte den Inbusschlüssel, nur wie auf dem Bild dargestellt.

E- Para el correcto ajuste, utilizar la llave fija tal y como se indica en la imagen.

