

HYUNDAI i40












berlina / sedan model 2012



MOCSKT 228





MOCSRR0AC011 cm 124

MOCSRR0AL007 cm 124

1 - L1215/1 ant sx 	1 - L1169/3 post dx 	4 - RC1500/60 	2 - RCVM6X9Q 
1 - L1215/2 ant dx 	1 - L1169/4 post sx 	4 - RC20200026 	6 - RCVM6X13Q 
2 - L1297/5 	2 - RCRD6/20/4 		1 - RCBR5 

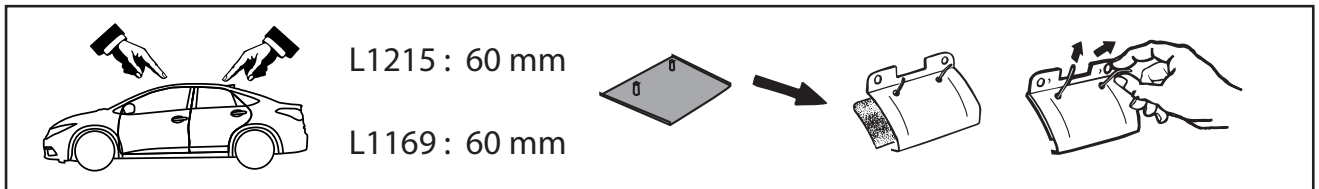


5 Nm



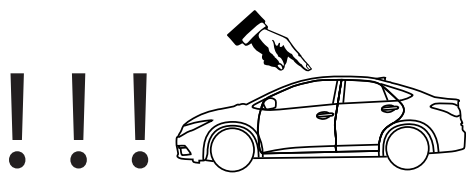
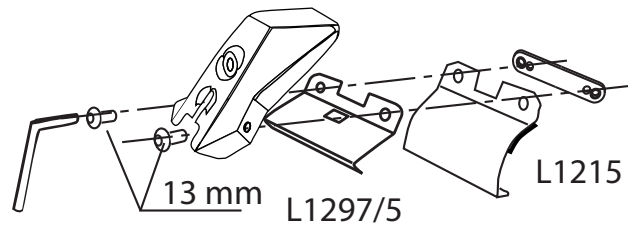


MOCSRR0AC011 cm 124


MOCSRR0AL007 cm 124

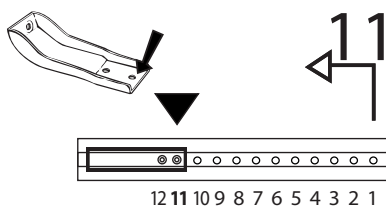

anteriore, avant, front,
vorne, delantera


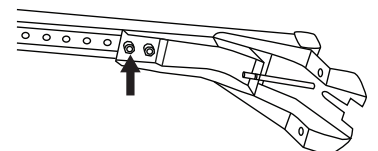
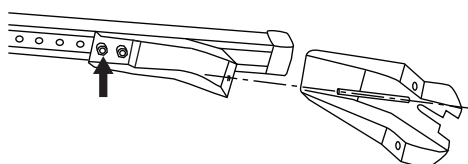

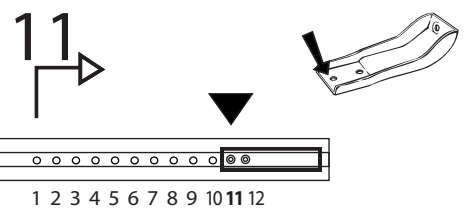


MOCSKT 228

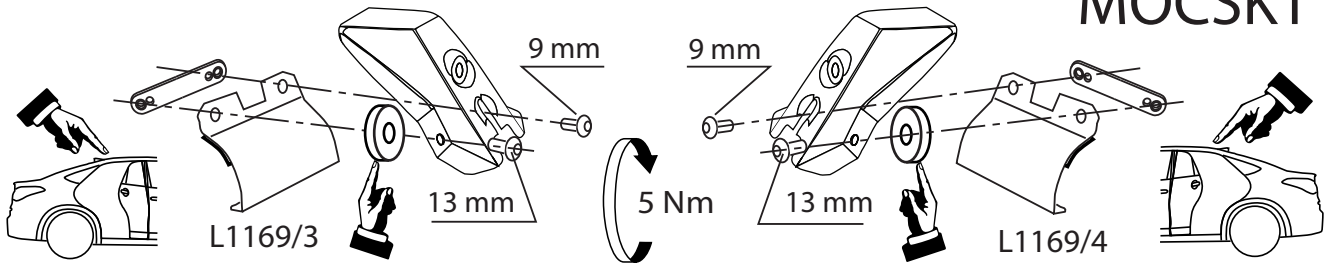


MOCSRROAC011 cm 124

MOCSRROAL007 cm 124

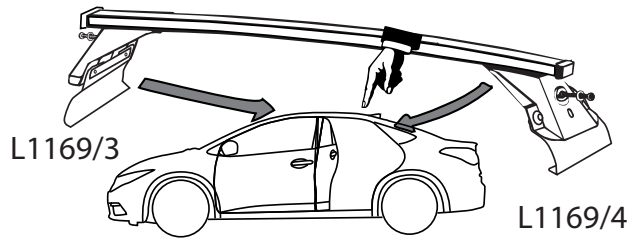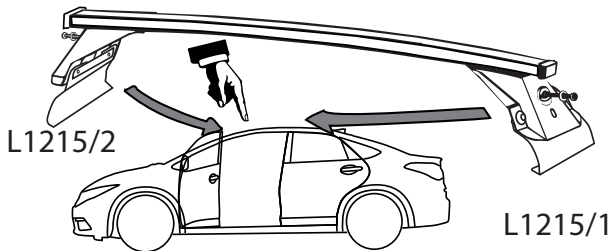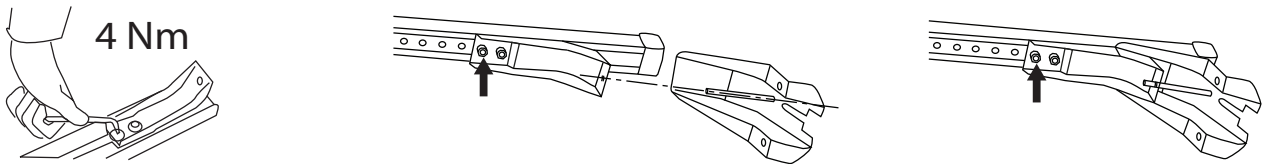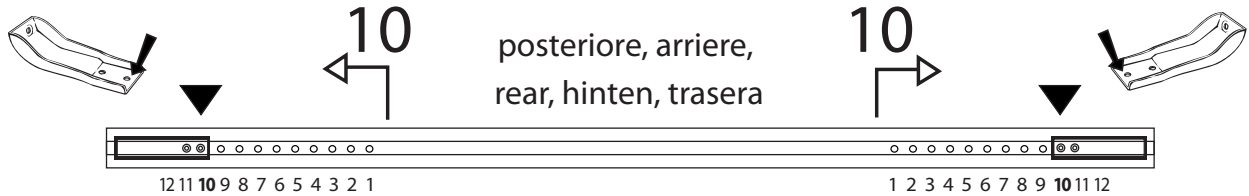

I-sez. tetto vettura
GB-roof section
E-seccion del techo

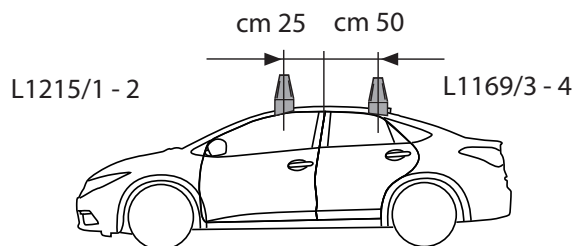

I-sez. tetto vettura
GB-roof section
E-seccion del techo

I - Per stringere, usare la chiave come indicato nel disegno. (Non si assumono responsabilità per danni causati dall'impiego di chiavi diverse da quella in dotazione al prodotto).

F - Pour serrer, utiliser la clé comme indiqué ci dessous.

GB - To tighten please use the wrench as per the drawing.

D - Zum Anziehen benutzen Sie bitte den Inbusschlüssel, nur wie auf dem Bild dargestellt.

E - Para el correcto ajuste, utilizar la llave fija tal y como se indica en la imagen

