

DS DS7 Crossback 2017 no rails

Patent pending
MOCSKT 0422

MOCSRR0AC0011 cm 124

MOCSRR0AL0007 cm 124



	1 - L1546/2				
	1 - L1546/1				
			2 - L1546/3		
4 - L1058/7		8 - RCVM6X9Q		1 - RCBR5	
4 - RCRD8Q		4 - RCVM6X14FSx filetto sinistro left-hand thread		1 - RCBR4	
			14 mm		

L1546/1

L1058/7

L1546/2

L1058/7

4 Nm

9mm

L1546/3


L1058/7

L1546/3

L1058/7

4 Nm

9mm

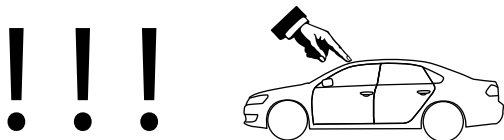

MOCSRR0AC0011 cm 124

MOCSRR0AL0007 cm 124




10

anteriore, avant, front,
vorne, delantera

10


12 11 10 9 8 7 6 5 4 3 2 1

1 2 3 4 5 6 7 8 9 10 11 12


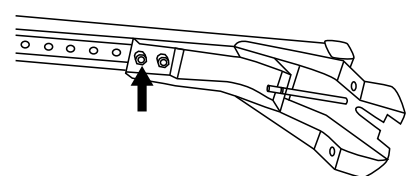
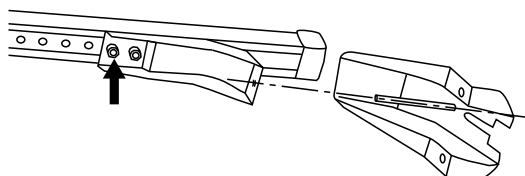



MOCSKT 0422

!!!



MOCSRR0AC0011 cm 124
MOCSRR0AL0007 cm 124

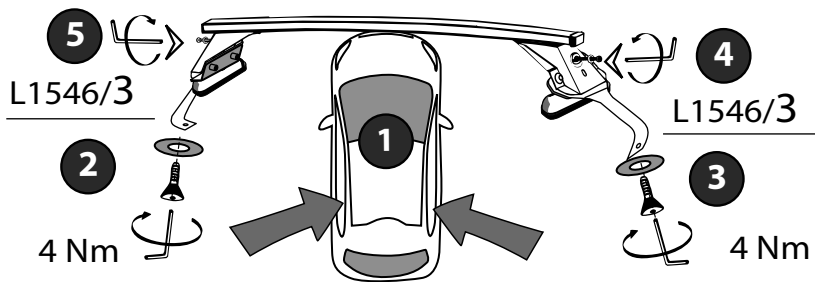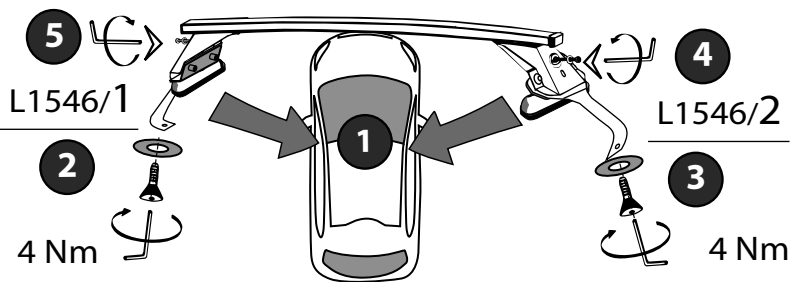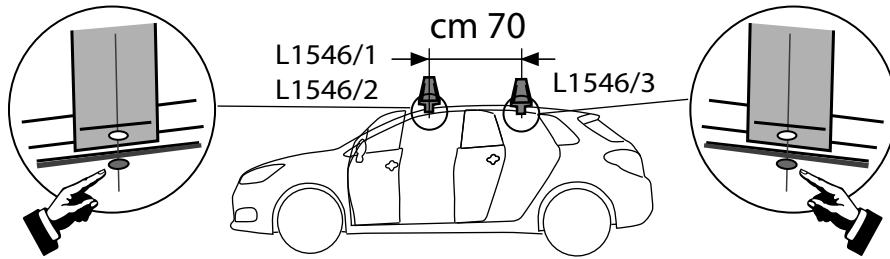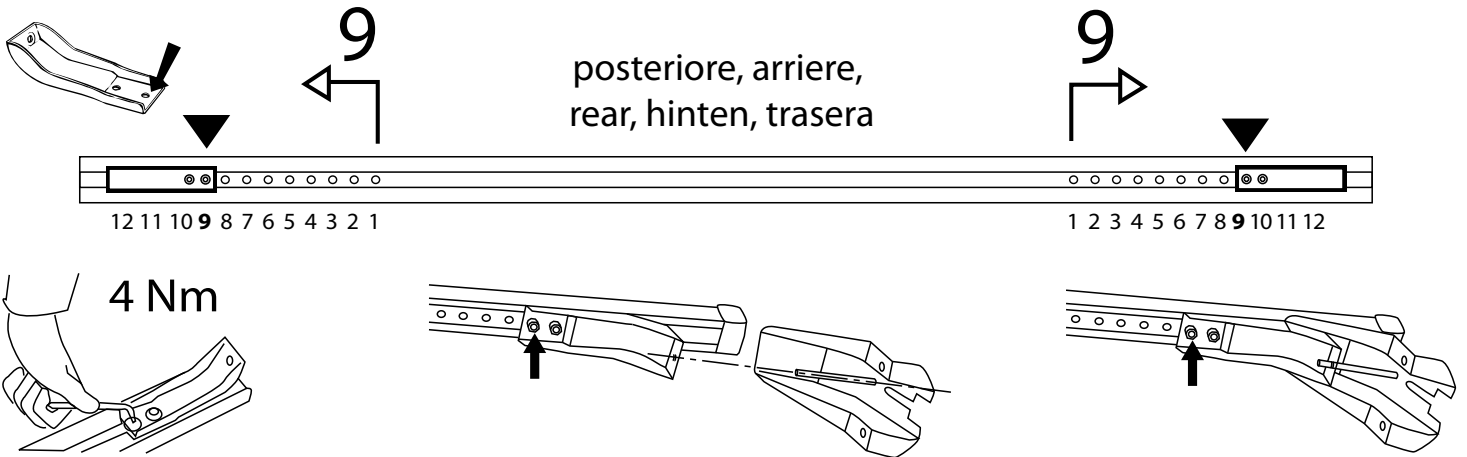

I - Per stringere, usare la chiave come indicato nel disegno. (Non si assumono responsabilità per danni causati dall'impiego di chiavi diverse da quella in dotazione al prodotto).
 F - Pour serrer, utiliser la clé comme indique ci dessous.

GB - To tighten please use the wrench as per the drawing.
 D - Zum Anziehen benutzen Sie bitte den Inbusschlüssel, nur wie auf dem Bild dargestellt.
 E - Para el correcto ajuste, utilizar la llave fija tal y como se indica en la imagen

